


RAM CLUTCHES

RAM CLUTCHES 9-1068
HYDRAULIC SLAVE/BEARING INSTALLATION
WORK SHEET
THE INFORMATION APPLIES TO
SINGLE AND DUAL DISC INSTALLATIONS

DIMENSION B: _____
- DIMENSION A: _____
(B-A) _____
= AVAIL SPACE _____
- DIMENSION C: _____
= SETUP GAP _____

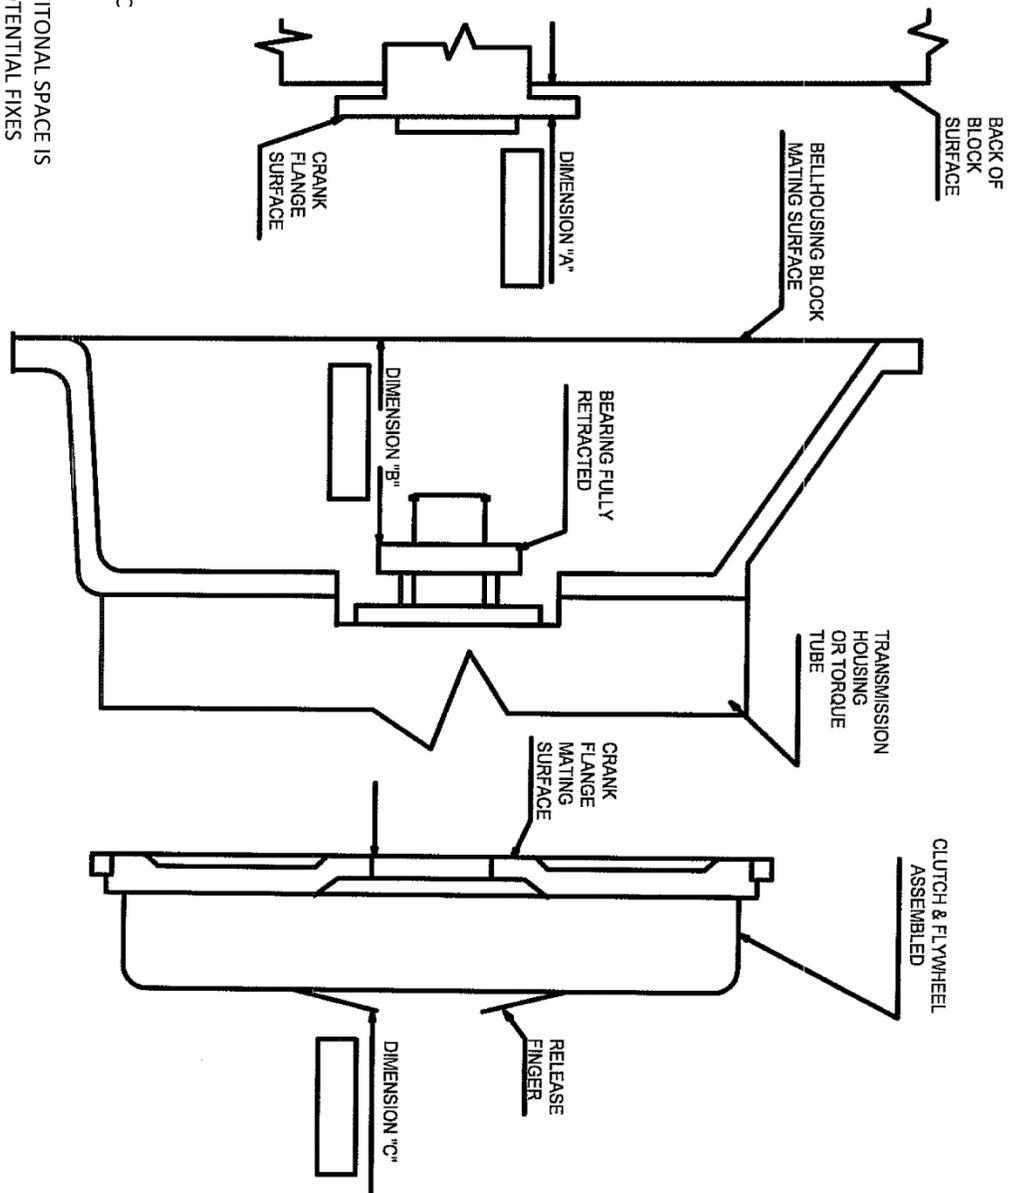

TARGET SETUP GAP IS .150" (SINGLE DISC CLUTCHES) TO .200" (DUAL DISC CLUTCHES)

IF SETUP NUMBER IS NEGATIVE, ADDITIONAL SPACE IS NEEDED. SEE INSTRUCTIONS FOR POTENTIAL FIXES